

# LCD-digital-clock with gong loudspeaker, potentialfree contact and 230 Volt

## C-75-VLP-M



## C-75-VLP-M

silver

VA-Steel

RAL

42 cm wide  
27 cm high  
4,5 cm deep

A modern wall clock with display of hours, minutes and seconds. This clock operates with 230 Volt, has a potentialfree contact to operate external signal horns and an installed gong for breaktimes.

This wall clock is equipped as standard version with batteries and 230 Volt power supply. The installed DCF-77 radio receiver enables precise breaktime signals and a precise time display. The installed 230 Volt power supply makes sure that the batteries need only be changed after many years (appr. 6 years).

If requested, programming of start and end of work as well as break times, can already be set from our factory. Different gong sequences (1 time gonging up to triple gonging) can be allocated optional in order to distinguish between work and break times.

A software is included in the delivery in order to enter work and break times comfortably from your Computer.

- Radio-controlled precise time and breaktimes
- Large display for long reading distances
- Automatic gong
- Operation of signal horns, potentialfree contact
- Easy programming via PC
- Sound and Volume adjustable
- Programmable for each day
- 16 switchtimes available. 1 daily repetition = 1 switchtime
- Symbols for radio signal reception, battery capacity, etc.
- Menu guidance for manual time settings
- Flat and modern design
- The 230 Volt enables a battery life of appr. 6 years
- High contrast display
- Many options

**This radio-controlled clock with precise time display for offices, companies, break rooms an more. A programmable installed loudspeaker and an installed potentialfree contact enable to operate also further signal horns.**

# C-75-VLP



## Technical Information:

Radio reception:	DCF-77
Quarz mode:	+/- 0,1 seconds per day
Symbolic Representation:	RF signal indication, battery capacity, menu guidance
Dimensions W x H x D:	422 x 270 x 45 mm
Front panel:	metall
Weight:	2100 g
Digit height:	Hour / Minutes: 75 mm; Seconds: 60mm
Reading distance hour/min.:	30 m
Reading distance seconds:	25 m
Viewing angle (max.):	170°
Digit colour:	black
Battery power:	4 pcs. 1.5 Volt AA
Battery life:	appr. 6 years
Amplifier output:	1 Watt
Contact:	normally open (230V / 5A capable)
switching times:	16 switchig times in total (1 daily repetition = 1 switching time)

## Standard version:


Integrated radio receiver DCF-77  
Automatic summer-/ wintertime changeover  
Battery life appr. 6 years  
230 Volt connection  
Installed loudspeaker  
Internal contact to operate further signal horns  
RS 232 Interface for programming  
PC-programme (minimum XP-Windows)  
Finish: silver metallic RAL 9006

## Options:

E - External antenna with 6 m connection cable and plug  
A - Satin stainless steel panel  VA-Steel  
S - **xxx** Special finish RAL  RAL  
NTP- Network-Synchronisation  
Air- AirTime Synchronisation  
T - Temperature display internal (installed)  
K - Temperature sensor external with appr. 6 m cable

## Ordering examples:

LCD-clock **C-V75-VLP** with stainless steel panel  
Order code: **C-75-VLP-A**

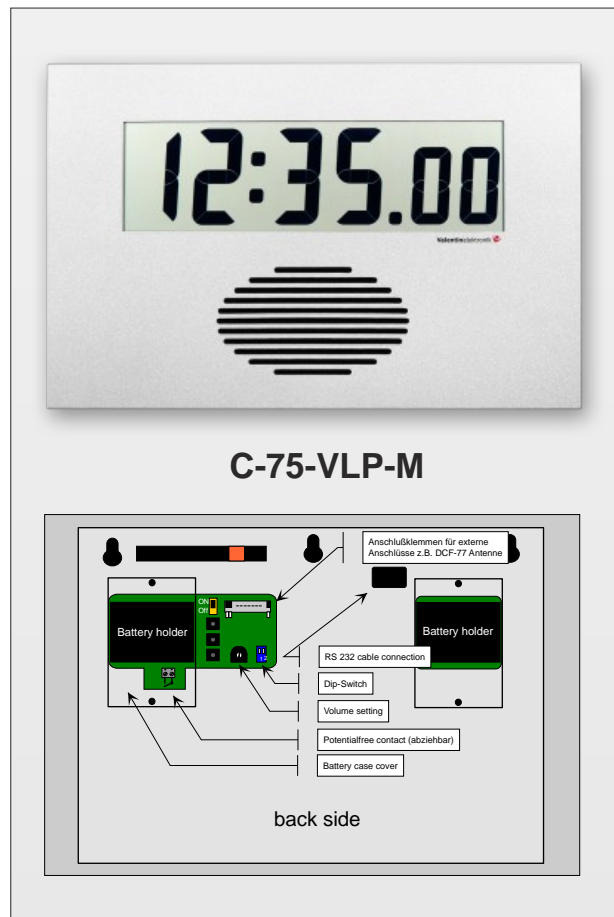

This clock is also available as installation version without blind frame.

Do you have any questions? No problem! Please contact us. We will be happy to provide you with help. No Obligation.