


# **LED-Flush-Mounted Clock HT-25**

## **Modern technology in a classy design.**

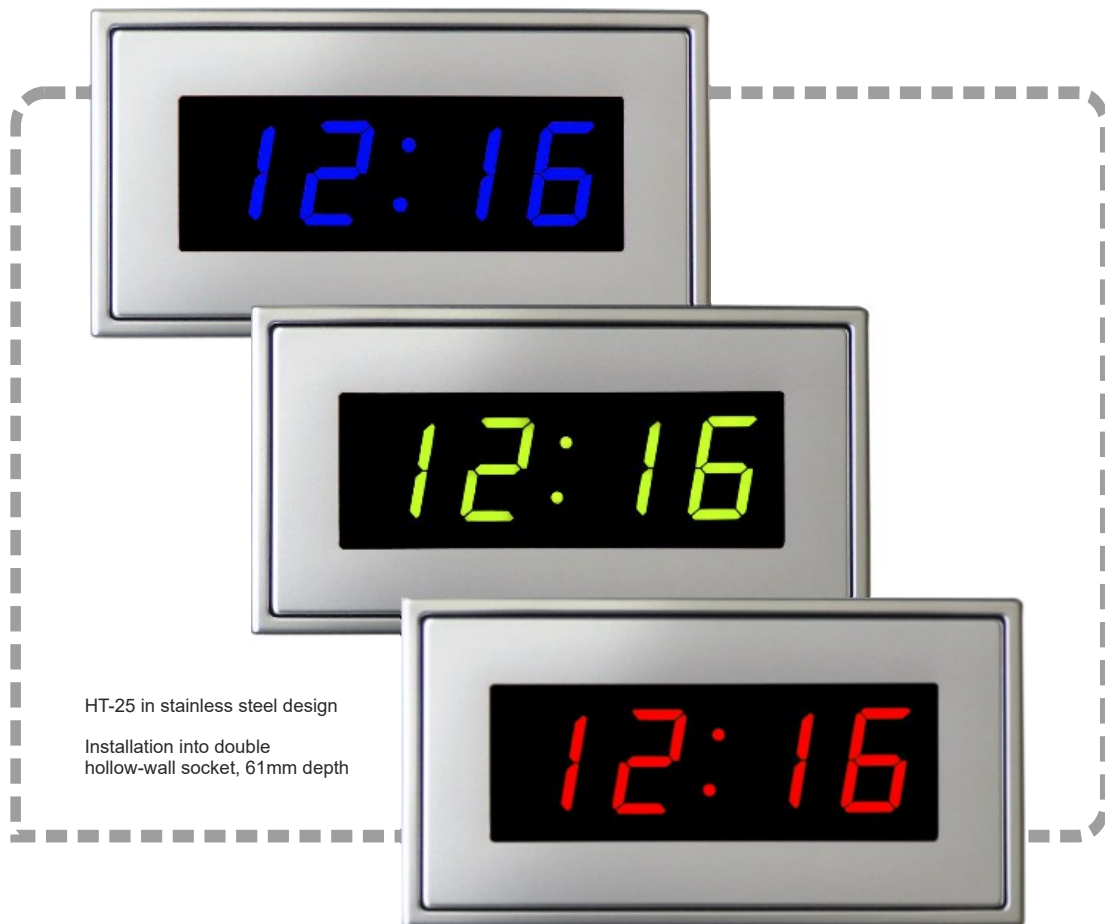

### **HT - 25**

#### **Technical data:**

<b>Operating voltage:</b>	230 Volt AC
<b>Power input:</b>	appr. 2 Watt (this energy saving technique cuts the energy cost into half)
<b>Power failure buffering:</b>	appr. 1 year
<b>Brightness control:</b>	automatic adjustment to the ambient light
<b>Clock change:</b>	automatic summer- / wintertime changeover (in respective countries)
<b>Synchronisation:</b>	via DCF-77 antenna (incl. 5 m cable for indoor areas)
<b>Rate accuracy:</b>	+ / - 0,1 seconds per day
<b>Dimensions clock frame:</b>	BxHxD 152x80x10 mm, built-in depth: 45 mm in pattress box
<b>Installation options:</b>	double hollow-wall socket 61 mm depth with pattress box
<b>Digit height &amp; colour:</b>	25 mm / green, blue or red
<b>Options:</b>	operating voltage 12 Volt DC

Subject to alterations.