

# ***LCD-digital-clock with display of seconds and programmable breaktimes***

**C-75-P-M**



It's Time

**C-75-P-M**

silver

VA-Steel

RAL

42 cm wide  
22 cm high  
3 cm deep

A modern wall clock with display of hours, minutes and seconds and optional operation of external signal horns through a potentialfree contact.

This wall clock is equipped as standard version with batteries and DCF-77 radio receiver. Therefore it operates wireless and independent without power supply and cable for 230 Volt. This will save you installation cost and the wireless installation also looks nicer on the wall.

For programming the clock can operate external signal horns through a potentialfree contact. A software is included in the delivery in order to enter work and break times comfortably from your Computer.

- **Wireless installation**
- **Radio-controlled and battery-powered**
- **Large display for long reading distances**
- **Operation of signal horns**
- **Easy programming via PC**
- **Programmable for each day**
- **16 Switching times in total. 1 daily repetition = 1 switching time**
- **Potentialfree contact to operate external signal horns**
- **Symbols for radio signal reception, battery capacity etc.**
- **Menu guidance for manual time settings**
- **Flat and modern design**
- **Battery life appr. 1 year**
- **High contrast display**
- **Many options**

**This radio-controlled clock with precise time display offers a wireless installation for offices, companies, break rooms and more. A programmable installed potentialfree contact enables to operate also further signal horns. Wireless installation suitable for offices, companies, breakrooms and more.**

# C-75-P-M



## Technical Information:

Radio reception:	DCF-77
Quarz mode:	+/- 0,1 seconds per day
Symbolic Representation:	RF signal indication, battery capacity, menu guidance
Dimensions W x H x D:	422 x 224 x 35 mm
Front panel:	metall
Weight:	1500 g
Digit height:	Hour / Minutes: 75 mm; Seconds: 60mm
Reading distance hour/min.:	30 m
Reading distance seconds:	25 m
Viewing angle (max.):	170°
Digit colour:	black
Battery power:	8 pcs. 1,5 Volt AA
Battery life::	appr. 1 year
Potentialfree contact:	normally open (230V / 5A capable)
Switching times:	16 switchig times in total (1 daily repetition = 1 switching time)

## Standard version:

Integrated radio receiver DCF-77  
Automatic summer-/ wintertime changeover  
Battery life appr. 1 year  
Finish in silver metallic RAL 9006

## Options:


V- Mains operation 230 Volt  
E - External antenna with 6 m connection cable and plug  
A - Satin stainless steel panel   
S - **xxx** Special finish RAL   
NTP- Network-Synchronisation  
Air- AirTime Synchronisation  
T - Temperature display internal (installed)  
K - Temperature sensor external with appr. 6 m cable

## Ordering examples:

LCD-clock **C-75-P-M** with stainless steel panel  
Order code: **C-75-P-A**

LCD-clock **C-75-P-M** with 230 Volt connection,  
in standard finish silvermetallic.  
Order code: **C-75-P-V-M**

# It's Time

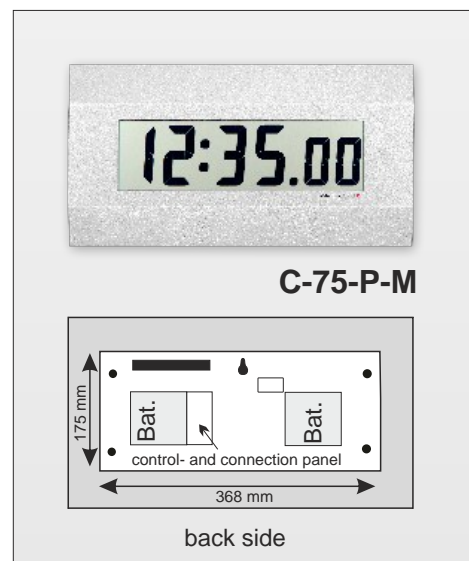

This clock is also available as installation version without blind frame.

Do you have any questions? No problem! Please contact us. We will be happy to provide you with help. No Obligation.